

INSTALLATION MANUAL

24-inch Mulch Kit — 19A30015000

Model 19A30015000 mulch kit is designed for use with select 24-inch single-blade cutting decks. Refer to your riding mower's Operator's Manual to assure compatibility.

Carton Contents

Before beginning installation, remove all parts from the carton to make sure everything is present. Carton contents are listed below. Part numbers are shown in parentheses.

- One 24" Deck Mulch Plug (731-2505)
- Two Hex Screws (710-06079)
- Two Flat Washers (736-0300)
- Two Speed Nuts (726-0201)

Note: The hardware is preassembled to the mulch plug at the factory.

Removing the Discharge Chute

1. Unthread the hex screws that secure the discharge chute in place. See Figure 1-1.
2. Remove the discharge chute from the deck discharge opening by lifting it off the deck.



WARNING: Never attempt to operate the mower without the discharge chute or the mulch plug properly in place.

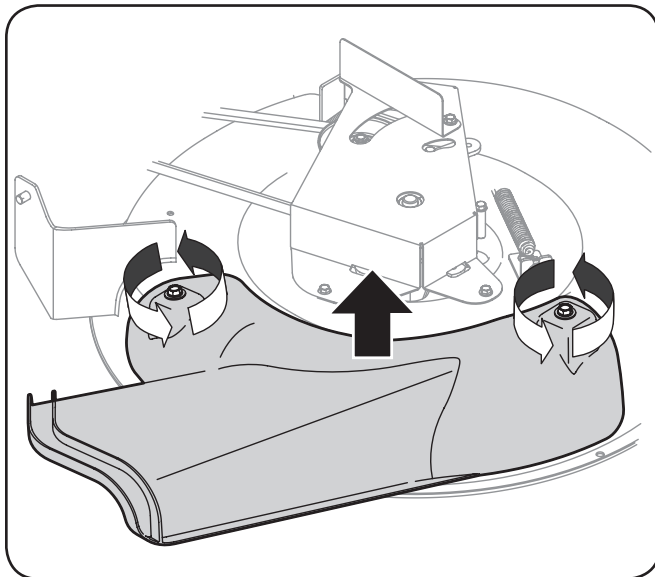


Figure 1-1

Installing the Mulch Plug

1. Position the mulch plug into the deck discharge opening on the deck and secure it in place by tightening the hex screws. See Figure 1-2.

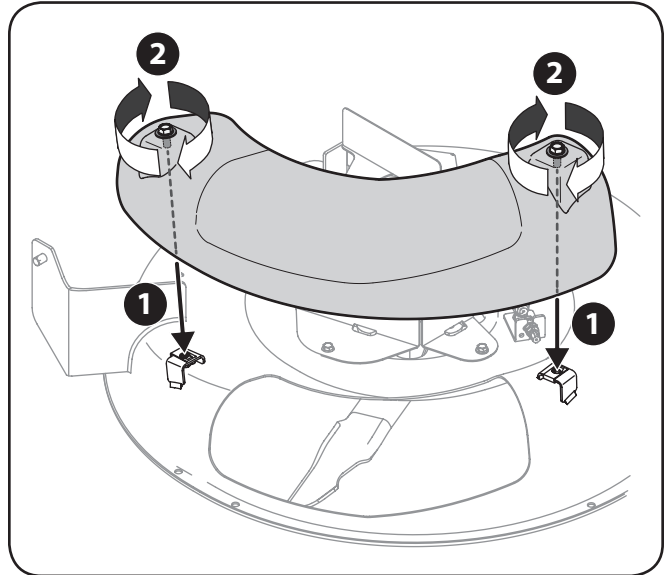


Figure 1-2

MTD LLC, P.O. BOX 361131 CLEVELAND, OHIO 44136-0019